

PUSH SWITCH

P/N:KAN1-21-L



SPECIFICATIONS

Function: Lock
Termination: THD version

Mechanical


Life Expectancy: 10,000 Operations

Electrical


Contact Rating: 100mA @ 30V DC
Dielectric Strength: 250VAC for 1minute
Contact Resistance: 100mΩ Max.
Insulation Resistance: 100MΩ Min.

Packaging


Bulk Package
Inner Package: Plastic bag
Outer Package: Carton

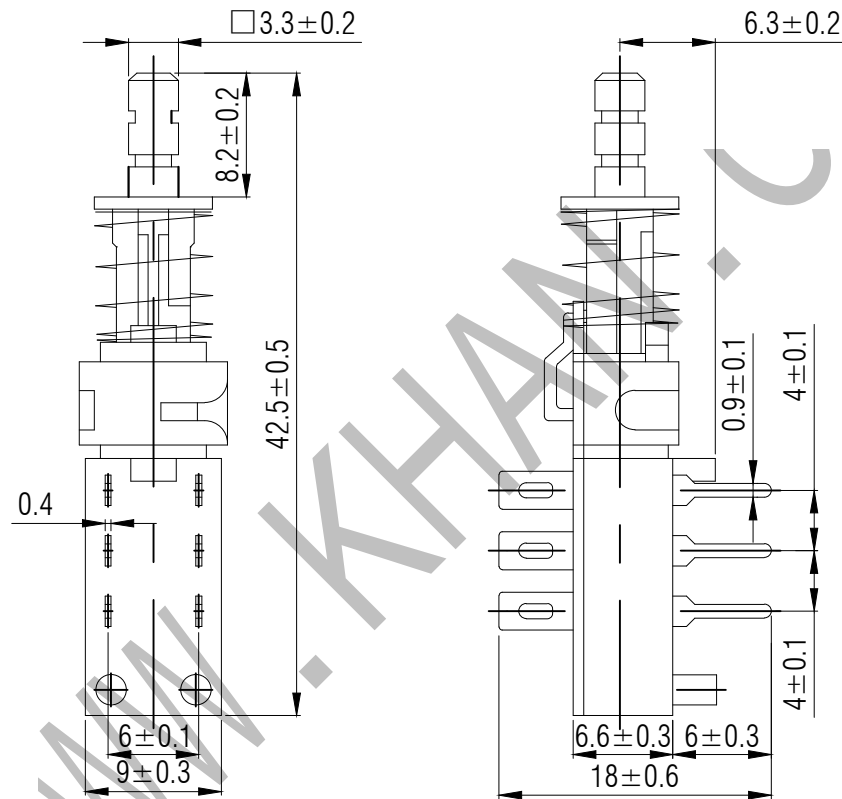

CIRCUIT DIAGRAM



P. C. B. LAYOUT



WENZHOU KHAN ELECTRONIC

VERSION		PROJECTION	DESIGN	朱树清
KH14FE22E			DRAWN	林伟
SCALE	SIZE	 Dimensions are shown:mm(inches)	APPROVAL	徐君辉
2:1	A4		2021.07.07	