



TACT SWITCH

P/N:TSA36311



SPECIFICATIONS

Function: Momentary action
 Contact Arrangement: SPST, Normally Open
 Termination: SMD version

Mechanical

Actuation Force: 180±50grams
 Life Expectancy: 30,000 Operations

Electrical

Contact Rating: 50mA @ 12V DC
 Dielectric Strength: 250V AC for 1minute
 Contact Resistance: 50mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Travel: 0.25±0.1mm

Environmental


Operating Temperature: -25~+70°C
 Relative Humidity: (40°C) ≤95%

Materials



5.Stem: Black GP.PC
 4.Cover: Ferrum with Nickelplate
 3.Contact: Stainless steel with Silver cladding
 2.Holder: Black GP.PA66
 1.Terminal: Copper (H62Y t=0.3) with Silver Cladding

Packaging


Bulk Package
 Inner Package: Plastic bag
 Outer Package: Carton

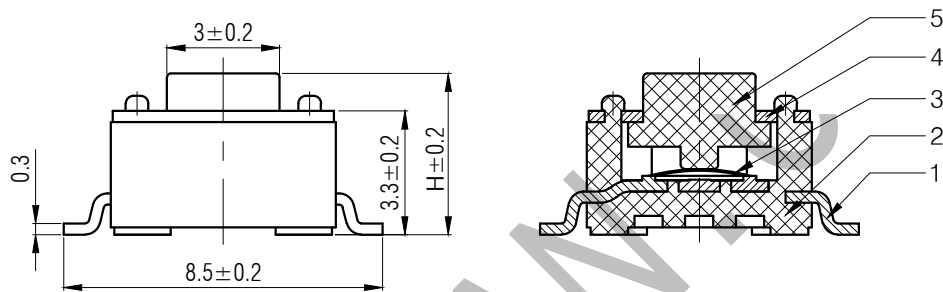

CIRCUIT DIAGRAM

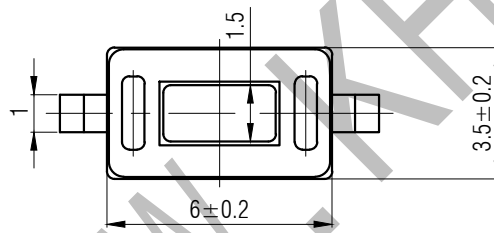

P.C.B. LAYOUT

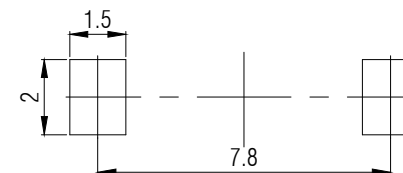

H	4.3	5	5.6	6.8	7
---	-----	---	-----	-----	---



KANGHONG ELECTRONIC

VERSION		PROJECTION	DESIGN
KH14FE22E			
SCALE	SIZE	 Dimensions are shown:mm(inches)	DRAWN
5:1	A4		2016.08.08